



GLOBAL SERIES

Air-Operated Double Diaphragm Pumps

G25AN

37 GPM Maximum Flow Rate

1 inch Port Size




The genesis of a new era is upon us! Specializing in pneumatically driven equipment for decades, we have combined genius technology with next generation manufacturing, enabling us to produce the latest genre of high quality pumps. The Global Series is now available worldwide for general industrial market applications.

Technical Specifications

Maximum Flow Rate	37 GPM
Port Size	1" Female NPT
Air Supply Pressure	30-100 PSI
Liquid Temperature	32-180°F
Maximum Air Consumption	30 SCFM
Weight	17.4 lbs.
Maximum Size Solid	1/8"
NPT Dimensions	8.25" L x 8.5" W x 12.4" H
Air Inlet	3/8" Female NPT
Body Material	Aluminum (ADC-12)
Discharge Volume Per Cycle	0.158 Gallons

Applications:

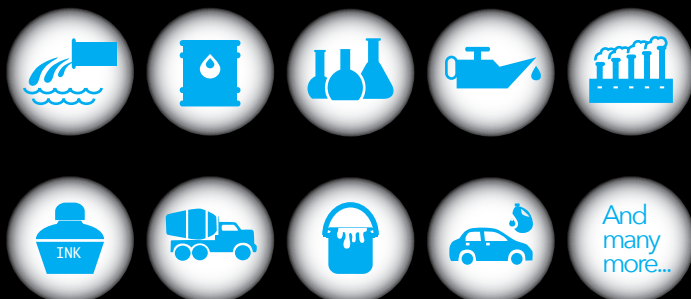



GLOBAL SERIES

Air-Operated Double Diaphragm Pumps

G25AN




Features & Benefits

- Truly non-lubricated (no grease pre-pack) / maintenance free air distribution system
- Stall Free / Ice Free operation
- Fewer Wearing Parts
- Ease of Repair - Quick teardown / Rebuild
- 20% less air consumption over competitor's pumps
- Drop in replacement for other brands

Graphite filled Ekonol® seal rings (lube free)




Independent, non-lubricated piloting system



Elastomeric Options

- Buna N
- Neoprene™
- Santoprene®
- EPDM (Nordel)
- Hytrel®
- Viton®

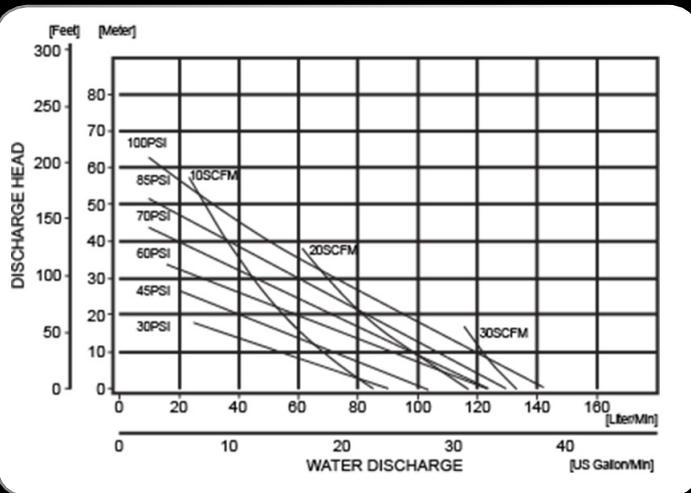

Toll Free: (855) 336-5425
www.globalseriespump.com

Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company.
 Kynar® is a registered trademark of Arkema.
 Nordel™ is a trademark of DuPont Dow Elastomers.
 Santoprene® is a registered trademark of Monsanto Co.
 Viton® is a registered trademark of DuPont Performance Elastomers.
 Ekonol® is a registered trademark of Saint_Gobain Advanced Ceramics LLC.

Local Distributor:

Form# GS0717